




# NO TOUCH EXIT SENSOR



**PTE-300**

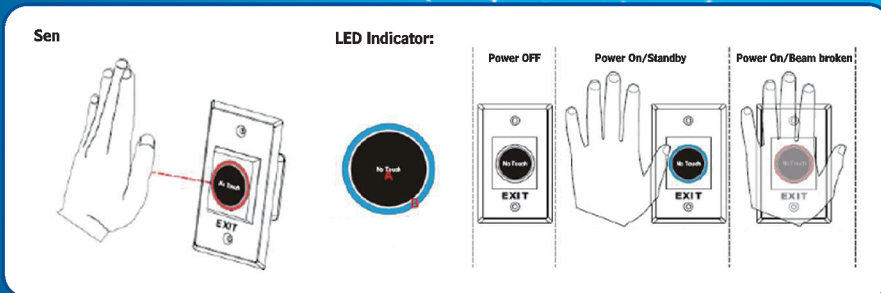

## Features & Application

- No touch /Touch-free Exit Sensor (Diffused Detection)
- Optical / Infrared Technology
- IP-55 Ingress Protection / SUS 304 Stainless steel Plate
- User friendly (Healthy protection): Free from contagious diseases spread
- Detection range: 0.1~10cm
- Application: Gate/Door/Exit/Automation control
- High capacity of relay dry contact (3A/AC120V,DC30V)  
Normally open/Normally close/Common relay output
- Twin led indicators for sensor standby or approached:  
(1)Sensor Standby:BLUE LED ON  
(2)Visitors whom approached to the sensor in 10cm: RED LED ON

## Specifications

- Contact Rating:3A/AC120V,DC30V
- Input Volt:DC12V
- Simple and clear for operation.
- Operation temperature range -20°C~55°C
- Life: 100,000 Times
- Durable stainless steel plate
- Dimension:115x70x29(mm)
- Weight:85g

The specifications herein are subject to change without prior notice due to improvements.