



KTH H-5 HEAVY DUTY DOOR

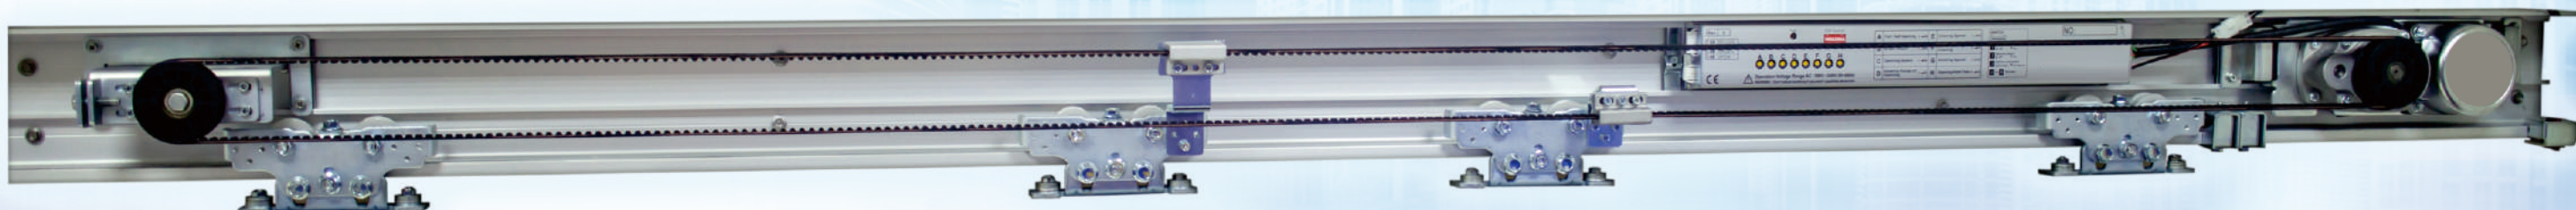

MICRO-CONTROLLER

Intelligence operator provides 8 functions of doors motions.

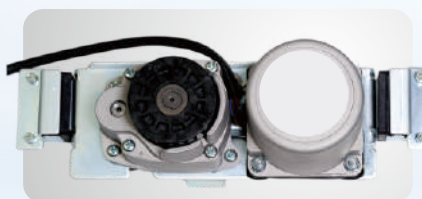

BRUSHLESS DC MOTOR


*120W brushless DC motor.



DURABLE HANGERS

Stable and durable.

Seesaw wheel hangers, quiet and smooth.

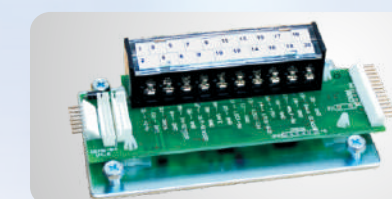

COMBINED TERMINAL BLOCK

FEATURES

- "PFC" Device (Power Factor Correction).
- Catch-return Safety System: During the door motion if there is a person or object block the travel line, the door will return.
- A wide range of AC Voltage Input (AC100~AC240V).
- No restrictions for used places, the best choice for city architectures. With top security device, no misgivings about danger.
- Excellent Quality & High-performance.
- Safety Certificate: CE
Factory Certificate: URS ISO 9001

TYPE	H-5	
MODEL	SINGLE-WINGED	BI-PARTING
DOOR WEIGHT	250kg X1(DOOR)	200kg X2(DOOR)
DOOR WIDTH	500mm-1200mm	500mm-2400mm
INSTALL WAY	SURFACE INSTALL	SURFACE INSTALL
MOTOR	DC24V 120W BRUSHLESS DC MOTOR	
CONTROL	STANDARD MICRO-CONTROL	
POWER CONSUMPTION	100W	
VOLTAGE	AC100V~240V	
ENVIRONMENTAL TEMPERATURE	-20℃~+50℃	
VOLUME	60 DECIBEL(MAX.)	
STARTING SPEED	600mm/SEC.	550mm/SEC.
STARTING TIME	0~64 SEC. (REGULABLE)	
TRANSMISSION IMPORTANT CONDITION	RACK BELT S8M	
OPENING DOOR RANGE	FULL/HALF-OPEN (REGULABLE)	
PFC POWER EFFICIENCY	0.95(IN AC100V FULL LOAD)	
TRACTION FORCE	3kg	

