


KTH H-18 HEAVY DUTY DOOR




FEATURES


- Install in factories, military bases and other high security areas to be protected.
- Special tracks and wheels, carrying heavier and more stable.
- Using a large radius of the pulley and greatly reduce noise and enhance the useful time.
- DC24V 120W brushless DC motor

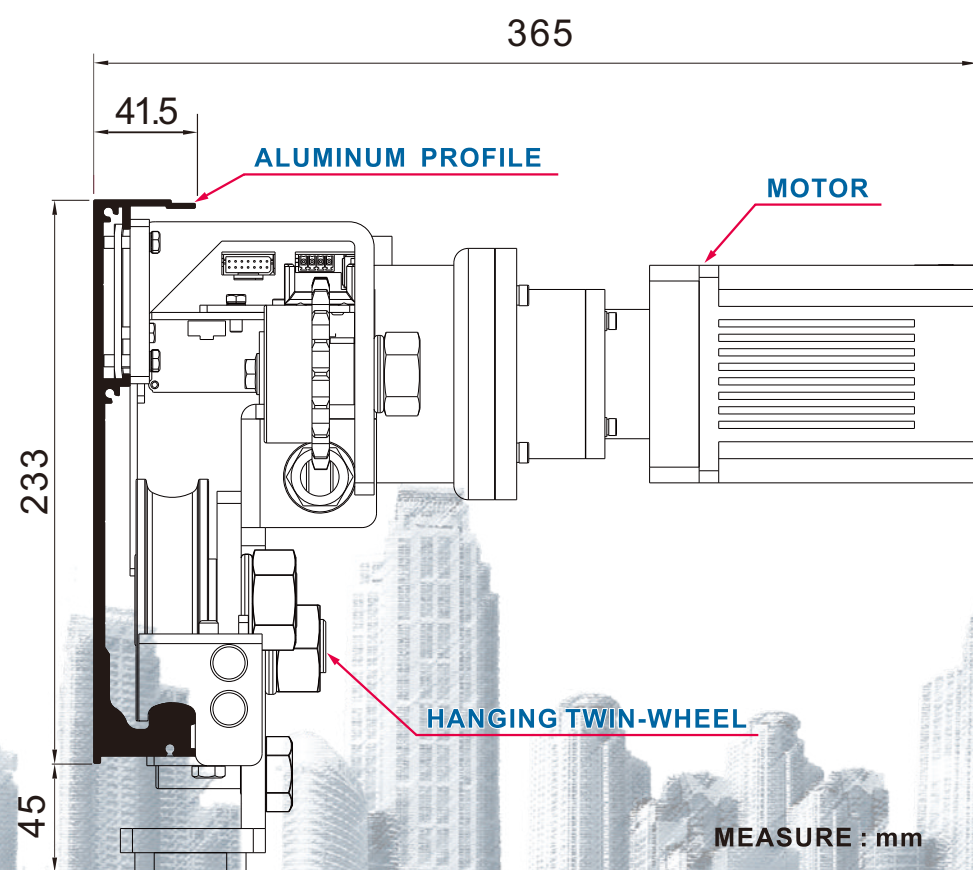

DURABLE HANGERS

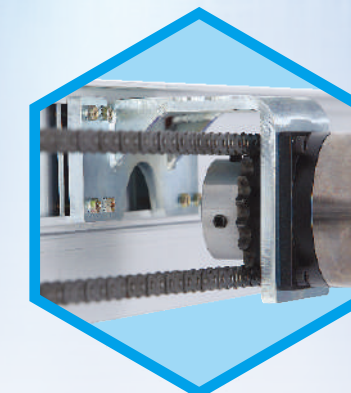

ROLLER CHAIN

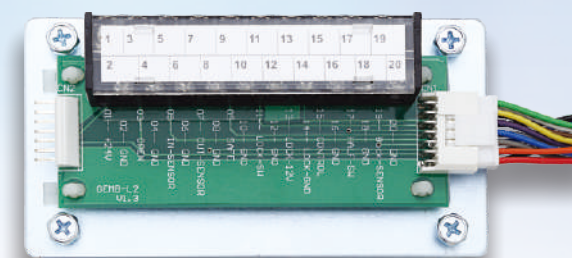

COMBINED TERMINAL BLOCK



H-18 CONTROLLER WITH CTB DEVICE



DC24V 120W MOTOR

TYPE	H-18	
MODEL	SINGLE-WINGED	BI-PARTING
DOOR WEIGHT	1000kg X1(DOOR)	900kg X2(DOOR)
DOOR WIDTH	500mm~6000mm	500mm~6000mm
INSTALL WAY	SURFACE INSTALL	SURFACE INSTALL
MOTOR	DC24V 120W BRUSHLESS DC MOTOR	
CONTROL	STANDARD MICRO-CONTROL	
POWER CONSUMPTION	120W	
VOLTAGE	AC100V~240V	
ENVIRONMENTAL TEMPERATURE	-20℃~+50℃	
VOLUME	60 DECIBEL (MAX.)	
STARTING SPEED	55mm~120mm /SEC.	
STARTING TIME	0~64 SEC. (REGULABLE)	
TRANSMISSION IMPORTANT CONDITION	ROLLER CHAIN 40-1R	
OPENING DOOR RANGE	FULL/HALF-OPEN (REGULABLE)	
PFC POWER EFFICIENCY	0.95(IN AC100V FULL LOAD)	
TRACTION FORCE	WHEN POWER OFF THE DOOR CAN BE OPENED BY MANUAL	