



KTH K-2 SLIDING DOOR

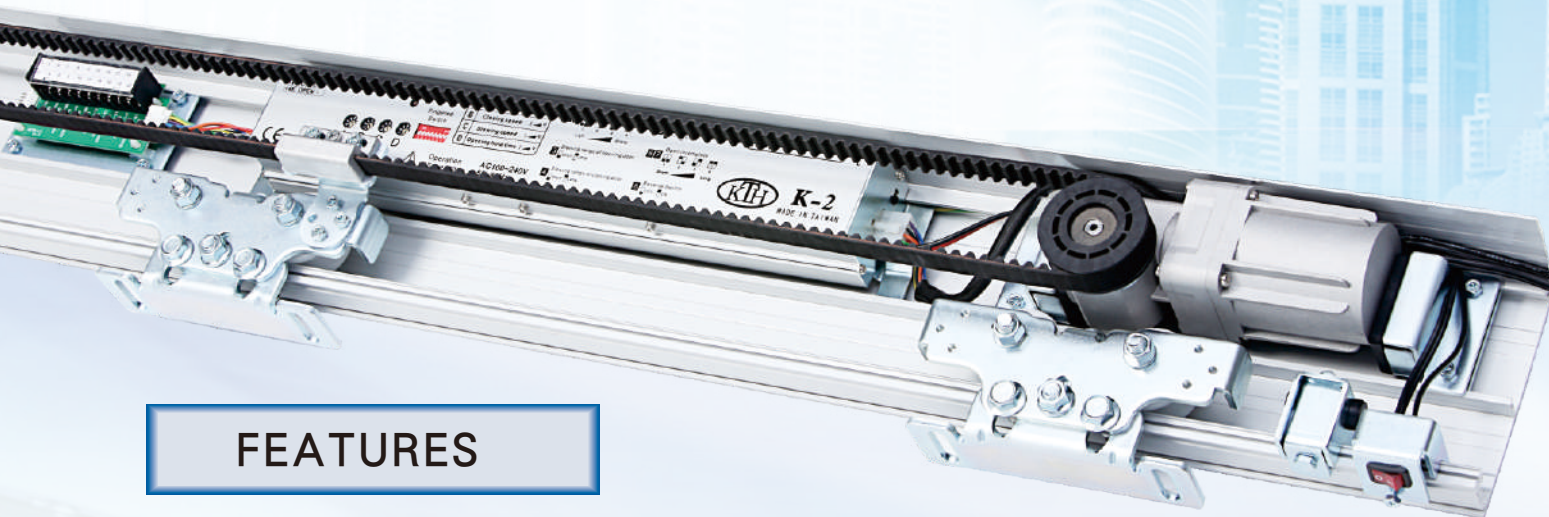

FEATURES

- Catch-return safety system:
During the door motion if there is a person or object block the travel line, the door will return.
- Safety certificate: CE
Factory certificate: URS ISO 9001
- Excellent Quality&High Performance.
- A wide range of AC Voltage Input (AC100~AC240V).
En16005: The latest regulation for the safety functions of automatic door in Europe.



WORM GEAR MOTOR
High technology, small in size, more space.




TWIN-WHEELS HANGERS
Stable and durable
Seesaw wheel hangers,
quiet and smooth.




MICRO-CONTROLLER & COMBINED TERMINAL BLOCK




MICRO-CONTROLLER & COMBINED TERMINAL BLOCK

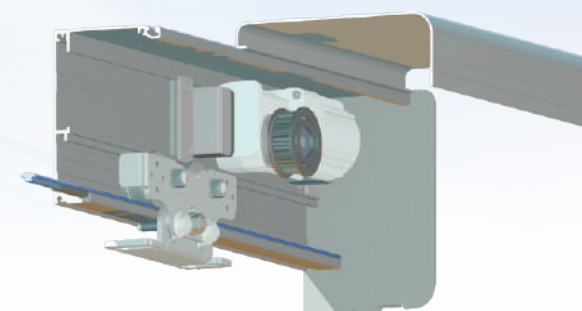


STANDARD

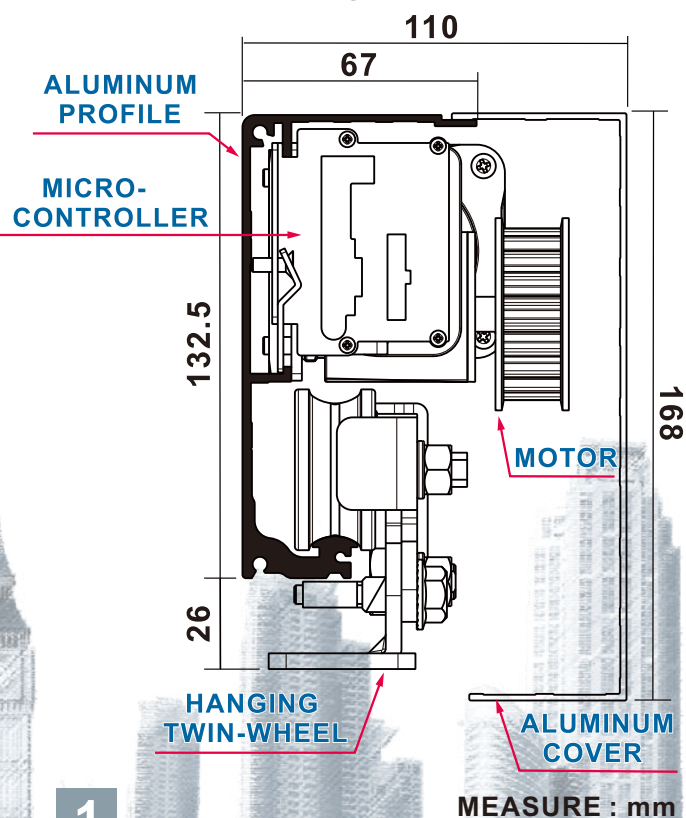

SLIM

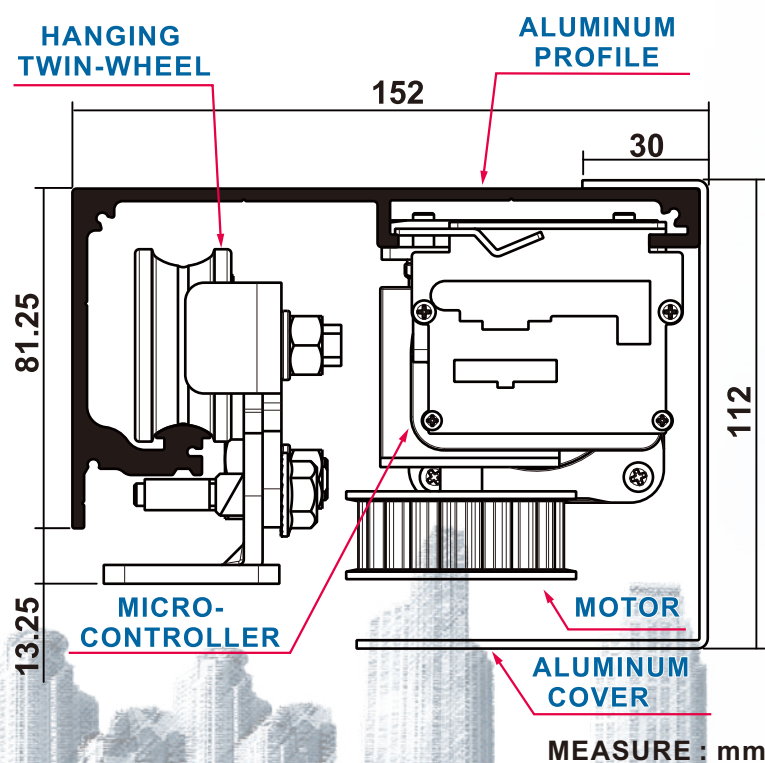

NOISELESS

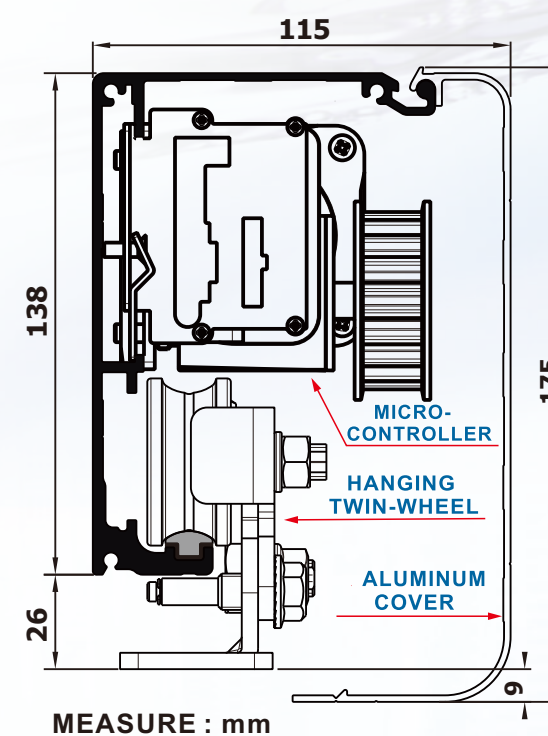

TYPE	K-2	
MODEL	SINGLE-WINGED	BI-PARTING
DOOR WEIGHT	120kg X1(DOOR)	100kg X2(DOOR)
DOOR WIDTH	500mm~2500mm	500mm~2500mm
INSTALL WAY	SURFACE INSTALL	SURFACE INSTALL
MOTOR	DC24V 75W WORM GEAR MOTOR	
CONTROL	MICRO-CONTROL	
POWER CONSUMPTION	75W	
VOLTAGE	AC100V~240V	
ENVIRONMENTAL TEMPERATURE	-20℃~+50℃	
VOLUME	60 DECIBEL(MAX.)	
STARTING SPEED	200~550mm/SEC.	
STARTING TIME	0~64 SEC. (REGULABLE)	
TRANSMISSION IMPORTANT CONDITION	RACK BELT S8M	
OPENING DOOR RANGE	FULL/HALF-OPEN (REGULABLE)	
TRACTION FORCE	3 kg	