
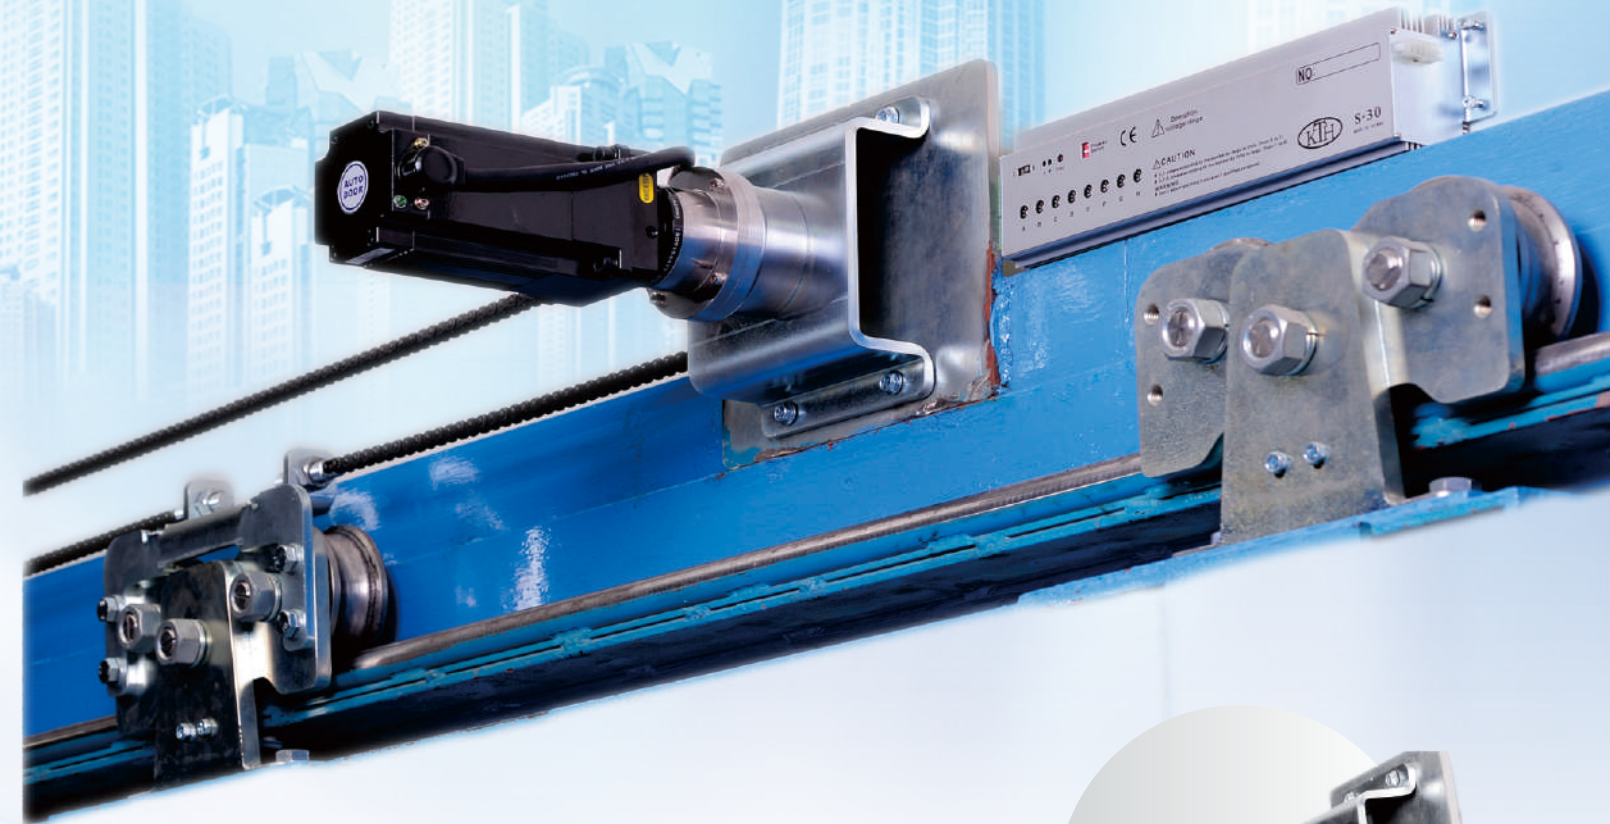


KTH S-30 SUPER HEAVY DOOR

FEATURES


- Install in factories, military bases, hospitals of radiation prevention door and other high security areas to be protected.
- Special tracks and wheels, carrying heavier and more stable.
- Using a large radius of the pulley and greatly reduce noise and enhance the useful time.
- DC24V 250W brushless DC motor (Planetary gear).

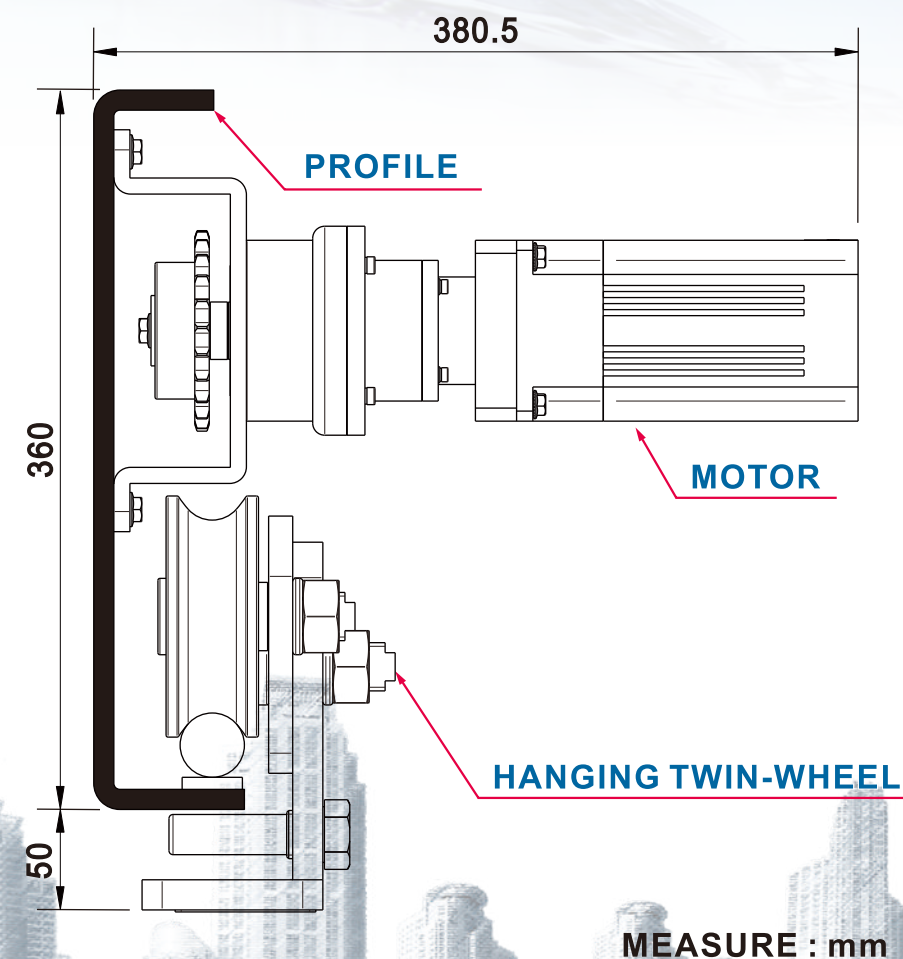

DC24V 250W BRUSHLESS DC MOTOR (PLANETARY GEAR)



TYPE	S-30	
MODEL	SINGLE-WINGED	BI-PARTING
DOOR WEIGHT	2000kg X1(DOOR)	1500kg X2(DOOR)
DOOR WIDTH	1M~6M	1M~6M
INSTALL WAY	SURFACE INSTALL	SURFACE INSTALL
MOTOR	DC24V 250W BRUSHLESS DC MOTOR (PLANETARY GEAR)	
CONTROL	STANDARD MICRO-CONTROL	
POWER CONSUMPTION	250W	
VOLTAGE	AC100V~240V	
ENVIRONMENTAL TEMPERATURE	-20℃~+50℃	
VOLUME	65 DECIBEL(MAX.)	
STARTING SPEED	150mm/SEC.	120mm/SEC.
STARTING TIME	0~64 SEC. (REGULABLE)	
TRANSMISSION IMPORTANT CONDITION	ROLLER CHAIN 40-1R	
OPENING DOOR RANGE	FULL/HALF-OPEN (REGULABLE)	
PFC POWER EFFICIENCY	0.95(IN AC100V FULL LOAD)	
TRACTION FORCE	WHEN POWER OFF THE DOOR CAN BE OPENED BY MANUAL	

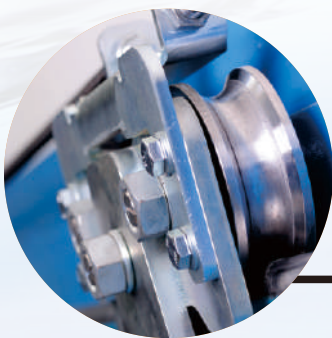

DURABLE HANGING TWIN WHEEL



S-30 CONTROLLER WITH CTB DEVICE