

Automatic Door Systems




A-2

AIRTIGHT DOOR

OPERATION INSTRUCTION


Our company has the following series of automatic door, please contact with our distributors/representations.

Round type door

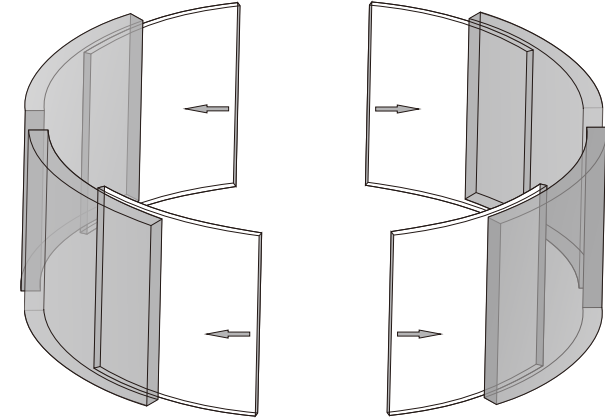


Installation: Please in accordance with the instruction of Round Type Door.

Curved type door

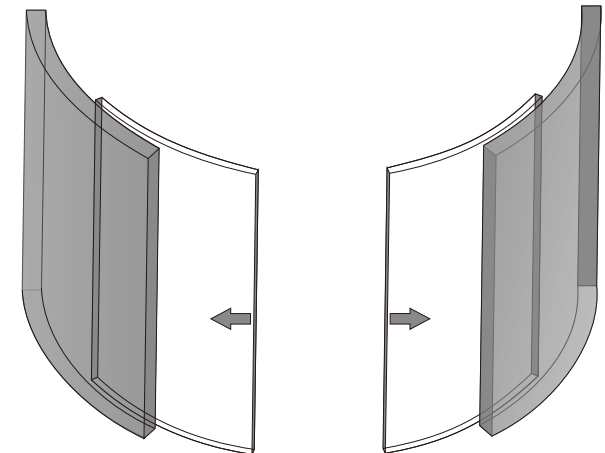


Installation: Please in accordance with the instruction of Curved Type Door.

Telescopic 4-winged Sliding Doors.

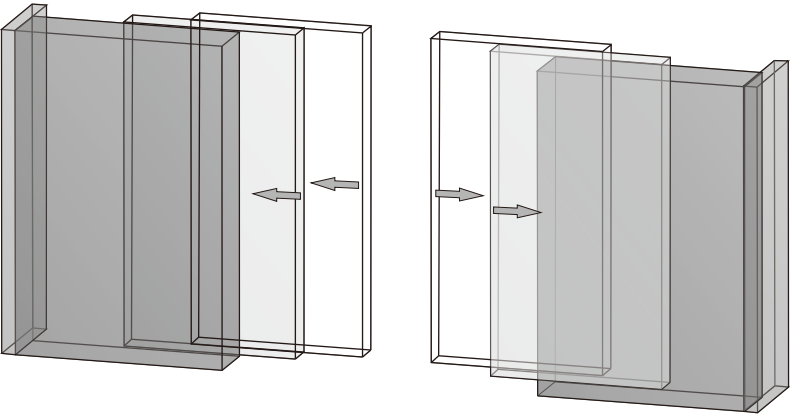





Installation: Please in accordance with the instruction of Telescopic 4-winged Sliding Doors.

Telescopic 2-winged Sliding Doors.



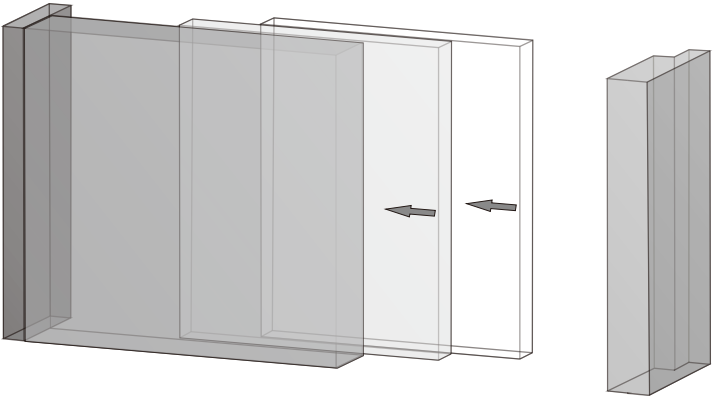


Installation: Please in accordance with the instruction of Telescopic 2-winged Sliding Doors.

Door-Leaf isn't smooth in operating.

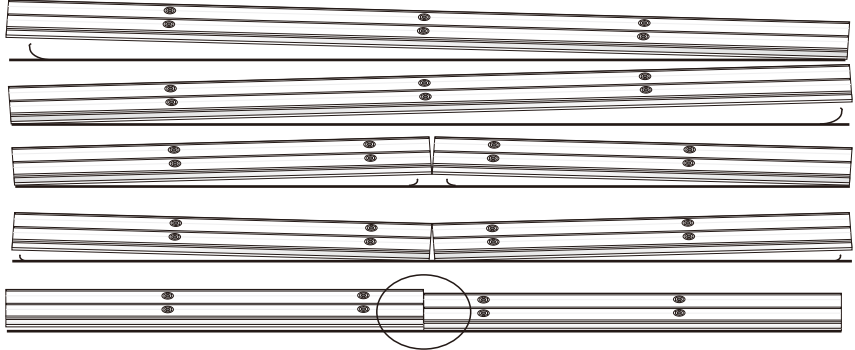Cause 1 HANGING TWIN-WHEEL is not at vertical position.  How to solve: Readjust the HANGING TWIN-WHEEL.	Cause 2 1. Door touches Ground Rail. 2. Ground Rail is dirty.  How to solve: 1. Readjust the distance between Door and Ground Rail. 2. Clean up the Ground Rail.	Cause 3 ALUMINUM PROFILE is not vertical.  How to solve: Readjust the vertical position of the ALUMINUM PROFILE.
Cause 4 ALUMINUM PROFILE is not at vertical position.  How to solve: Readjust the level position of the ALUMINUM PROFILE.		


The Door-Leaf sends out abnormal noise in operating.

Cause 1 The SCREW of the HANGING TWIN-WHEEL is loose.  How to solve: Refasten the SCREW of HANGING TWIN-WHEEL.	Cause 2 HANGING TWIN-WHEEL is broken.  How to solve: Replace a new one HANGING TWIN-WHEEL.	Cause 3 HANGING TWIN-WHEEL is dirty.  How to solve: Clean the HANGING TWIN-WHEEL.
Cause 4 ALUMINUM PROFILE is dirty.  How to solve: Clean the ALUMINUM PROFILE.		

1.	COMPONENTS SPECIFICATION.....	P1
2.	TECHNICAL SPECIFICATION.....	P2
3.	SECTIONAL DRAWING.....	P3
4.	INSTALLATION DRAWING.....	P4
5.	INSTALL PROCEDURE.....	P5
6.	INSTALL THE BELT ROLLER.....	P6
7.	THE POSITION OF THE HANGING TWIN-WHEEL.....	P7
8.	INSTALL THE RACK BELT.....	P8
9.	ADJUST THE DOOR-LEAF.....	P9
10.	CONNECTION.....	P10
11.	OUTPUT CONNECT.....	P11
12.	TEST AND ADJUST.....	P13
13.	ADJUSTMENT.....	P14
14.	BROKEN CHECKING.....	P16
15.	TROUBLESHOOTING.....	P17
16.	TROUBLESHOOTING(ILLUSTRATED).....	P18




MICRO-CONTROLLER

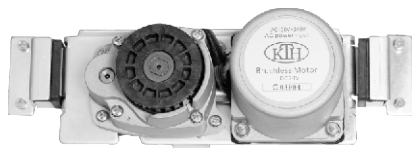


BRUSHLESS DC MOTOR



POWER SWITCH



BELT ROLLER




COMBINED TERMINAL BLOCK



HANGING WHEEL-2 PCS



ACTIVE BRACE



RACK BELT



BLOCK SCREW-6 PCS



SENSORS (OPTIONAL DEVICE)



HANGING BRACE-3 PCS



**STOPER -1PC
IN PROFILE)**



GROUND HOLDER



DOOR SCREW-6 PCS




**RUBBERS AND FIX TRACK
(OPTIONAL DEVICE)**



Door can't be opened or closed.

Cause 1
Above the Door-Leaf touched with the crossbeam.



How to solve:
Adjustment the interval between the Door-Leaf height and Crossbeam.

Cause 2
The Door-Leaf touched with the Ground Guide Rail.



How to solve:
Adjust the Door-Leaf height.

Cause 3
Door-Leaf derails the ALUMINUM PROFILE.




How to solve:
Put the Door-Leaf into the ALUMINUM PROFILE again.

Cause 4
Door-leaf is not vertical.



How to solve:
Adjust the Ground Guide Rail/Wheel position.

Cause 5
SENSOR is broken or disconnects to the COMBINED TERMINAL BLOCK.

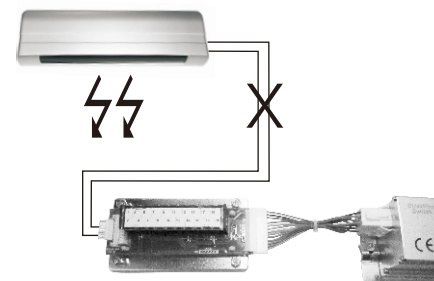


How to solve:
1.If SENSOR is broken please change a new one.
2.Check SENSOR whether it connects to the COMBINED TERMINAL BLOCK.



PROBLEMS	REASONABLE	CHECK	HOW TO SOLVE
DOOR CAN'T BE MOVED.	1.No power.	Broken circuit.	Check the broken circuit position.
		The Power Switch is not opened.	Open the POWER SWITCH.
	2.The door is locked.	Door is locked and no movement action.	Open the DOOR LOCK.
	3.The sensor is broken.	Signal light is WORKING.	Check the MICRO-CONTROLLER.
		Signal light is OUT OF WORKING.	Check the CIRCUIT OF SENSOR or change a new one SENSOR.
SPEED	1.Speed is too slow.	Check the Speed at KNOB of MICRO-CONTROLLER.	Adjust the Speed of Open/Closed Door.
	2.Door runs into the obstructor, then cause the Door moving slow.	Installation problem or dirty.	Reinstall or clean the ALUMINUM PROFILE.
	3.Door is difficult to move.	Turn off the power.Use hand to move the Door, besides, check the Ground Guide Rail whether it is dirty.	Clean the Ground Guide Rail.
		Check the HANGING TWIN-WHEEL whether it is broken.	Change a new one.
		Check the Door Bolt in the door bottom whether it is loosen.	Fix the Door Bolt.
		Check whether the Ground Wheel is broken.	Change a new Ground wheel.
DOOR CAN'T FULL OPEN.	In the Half-Open way.	Check the Knob/Switch.	Turn on to Full Open.
DOOR CAN'T CLOSE.	1.In the Full-Open way.	The SENSOR keeps working.	Check wiring or change a new SENSOR.
	2.The Door opens suddenly while it is moving to close .	The SENSOR probably is installed with something wrong.	Adjust the SENSOR or change a new one.

MODEL	AIRTIGHT DOOR STANDNARD: SINGLE-WINGED
TYPE	A-2
DOOR WEIGHT	200kg X1(door)
DOOR WIDTH	DW=500mm~3000mm
INSTALL WAY	Surface install
MOTOR	DC24V 120W BRUSHLESS DC MOTOR
CONTROL	STANDARD MICRO-CONTROLLER
POWER CONSUMPTION	120W
VOLTAGE	AC100V~240V
ENVIRONMENTAL TEMPERATURE	-20℃~+50℃
VOLUME	60decibel(max.)
STARTING SPEED	480mm/second
STARTING TIME	0~64 sec. (regulable)
TRANSMISSION IMPORTANT CONDITION	RACK BELT S8M
OPENING DOOR RANGE	FULL/HALF-OPEN (regulable)
PFC POWER EFFICIENCY	0.95(AC100V/in AC100V Full load)
TRACTION FORCE	3.5 kg

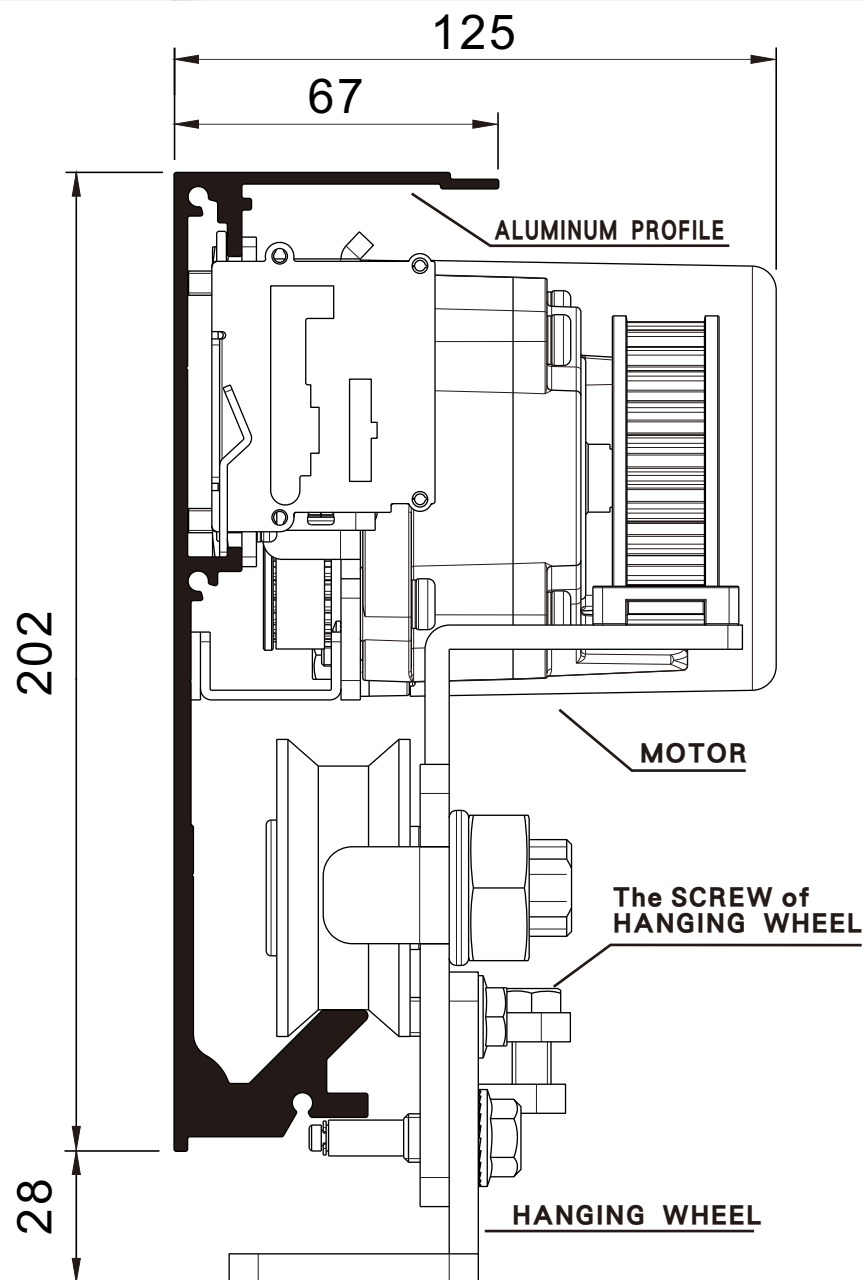

1. Turn off power.
2. Use your hand to move the Door-Leaf.

Preliminary analysis

Running isn't Smooth

Running smooth

Check the circuit

1. Turn on power.
2. Take out the sensor signal line.
3. Test the circuit of SENSOR.

Running check

Running smooth

Running isn't Smooth

The PROBLEM of the MOTOR

1. Wiring connects fault.
2. Spare parts of the MICRO-CONTROLLER broken.

1. Check the distance between Door and Wall / Crossbeam.

2. HANGING TWIN-WHEEL is broken.

3. The GROUND RAIL is dirty.

4. The Door-Leaf becomes deformed.

5. Check BLOCK SCREW whether need to adjust.

6. The GROUND GUIDE WHEEL is damaged.

7. Check the LOCK whether it is broken.

8. Check the ALUMINUM COVER whether it isn't fixed.

9. There is dirt inside the ALUMINUM PROFILE.

The PROBLEM of the SENSOR

1. Check the SENSOR whether it is broken.

2. Check the SENSOR whether the wire is broken or short circuit.

1

Prepare

Should correct the height and the leveling of the ALUMINUM PROFILE



2

Cut and install the ALUMINUM PROFILE



3

Install the SENSORS



4

MOTOR



5

MICRO-CONTROLLER

6

Install the BELT ROLLER



7

Hang and adjust the Door-Leaf



8

Install and adjust the BELT



9

Power connect



10

Test and adjust

**A** Full/Half opening

Adjust the RANGE of the HALF OPEN DISTANCE.
Higher number, wider range.

**B** Brake power

The Door-Leaf is slight, the BRAKE POWER is less.
Please choose 0~2 if the Door-Leaf is under 50kg.
Please adjust number from number 5 if the Door-Leaf is over 80kg.

**C** The opening speed of the door

Adjust the OPEN SPEED
Higher number, faster speed.
CAUTION: please adjust the number one by one from low to high.

**D** The slowing range of opening door


Adjust the SLOW RANGE of OPENING DOOR
Higher number, more range about the slow range at open door position.
CAUTION: please adjust the number one by one from high to low.

Before turn on the power, make sure the Door-Leaf can be smoothly moved, and the electric link is correct at first.

1.SYSTEM PROGRAM REMEMBER

After turn on the power, the MICRO-CONTROLLER will remember the distance and the range.

2.ADJUST

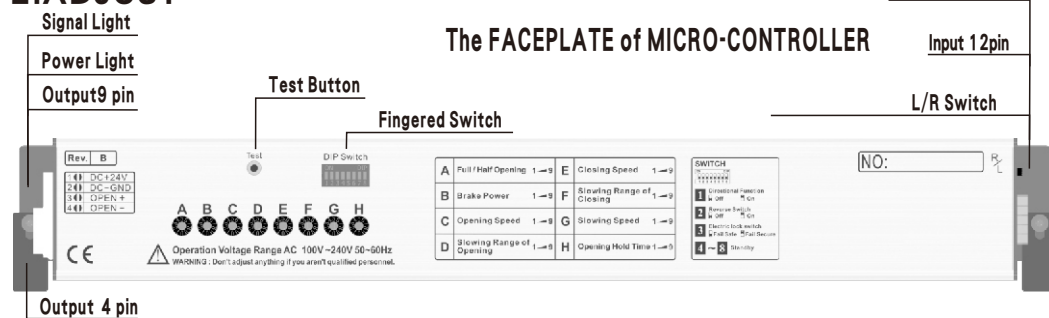

Red LED-Power is connected.

Green LED-Input the open door signal.

L/R switch-The direction of the door opening: right/left(R/L).

Fingered Switch- Pin 1 - Directional Function

Operation $\left\{ \begin{array}{l} \text{OFF: Normal mode.} \\ \text{ON: push once, open the door. Push again, close the door.} \end{array} \right.$


Fingered Switch- Pin 2- Reverse Switch: in order to control opening and closing direction of the Door-Leaf after power resumes.

Operation $\left\{ \begin{array}{l} \text{OFF: Normal mode, after power resumes, the Door-Leaf opens the door first.} \\ \text{ON: suitable for Security System, after power resumes, the Door-Leaf closes the door first.} \end{array} \right.$


DIP Switch- Pin 3 - Electric lock switch

☐ Fail Safe ☐ Fail Secure



Fingered Switch-Pin4 ~ Pin 8 - Standby

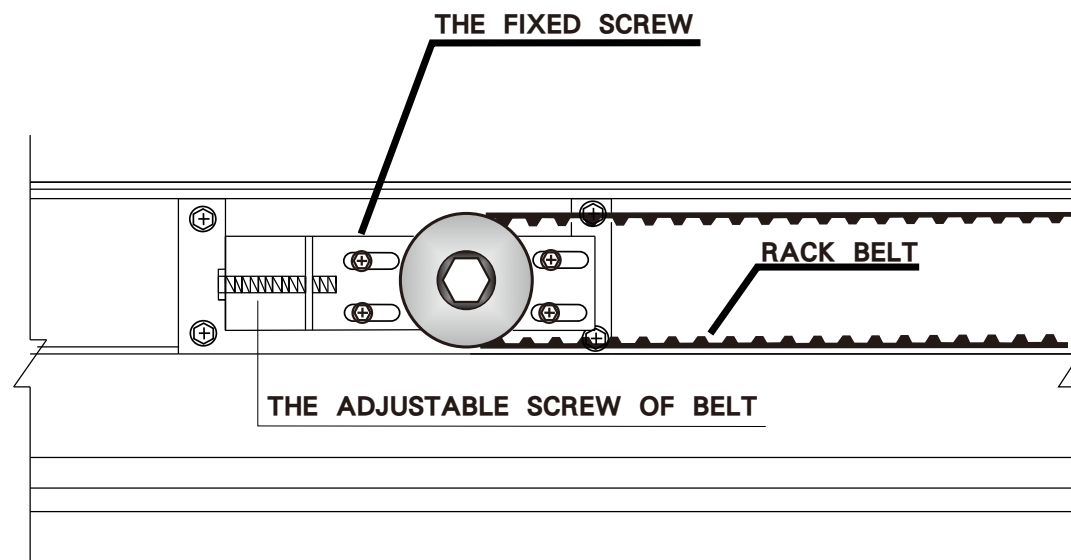

TENSION of BELT can be adjusted by the ADJUSTABLE SCREW of BELT, after that, must tighten the FIXED SCREW of BELT.

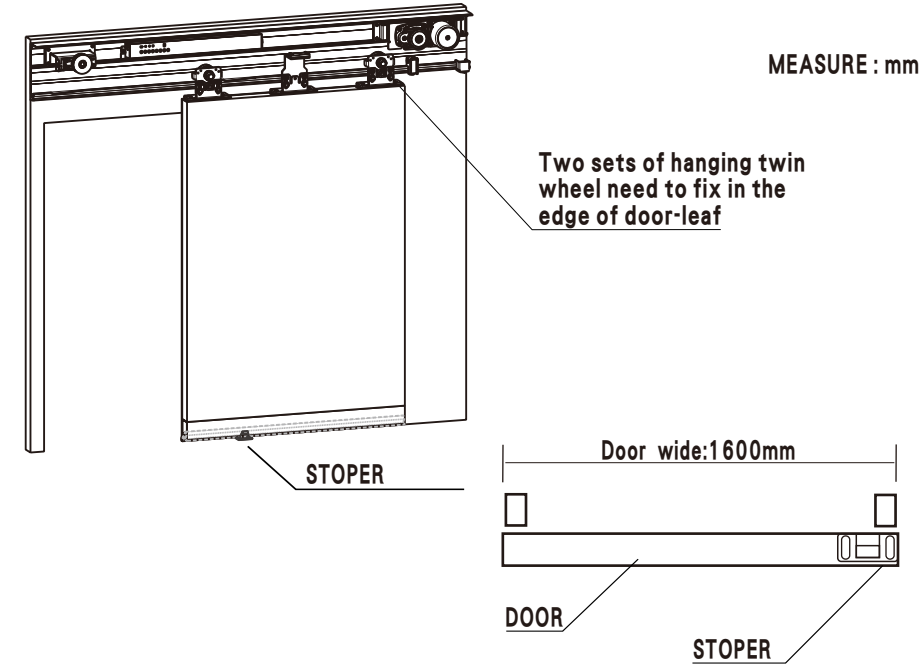


THE INSTALLATION OF THE ROBBERS AROUND THE DOOR PANEL

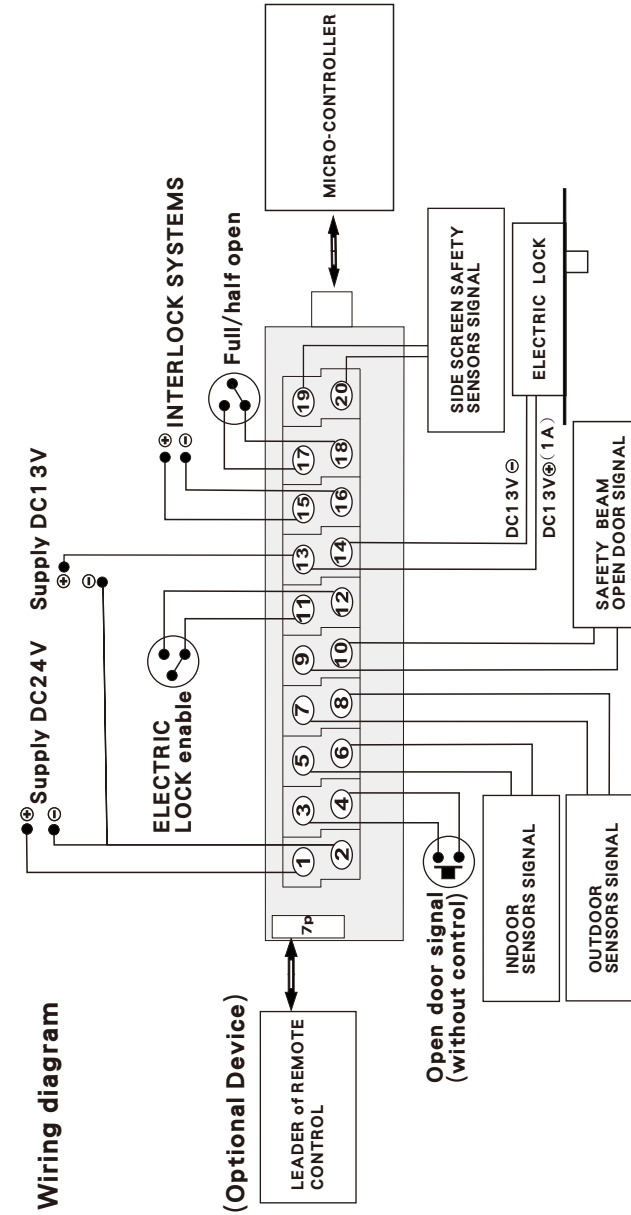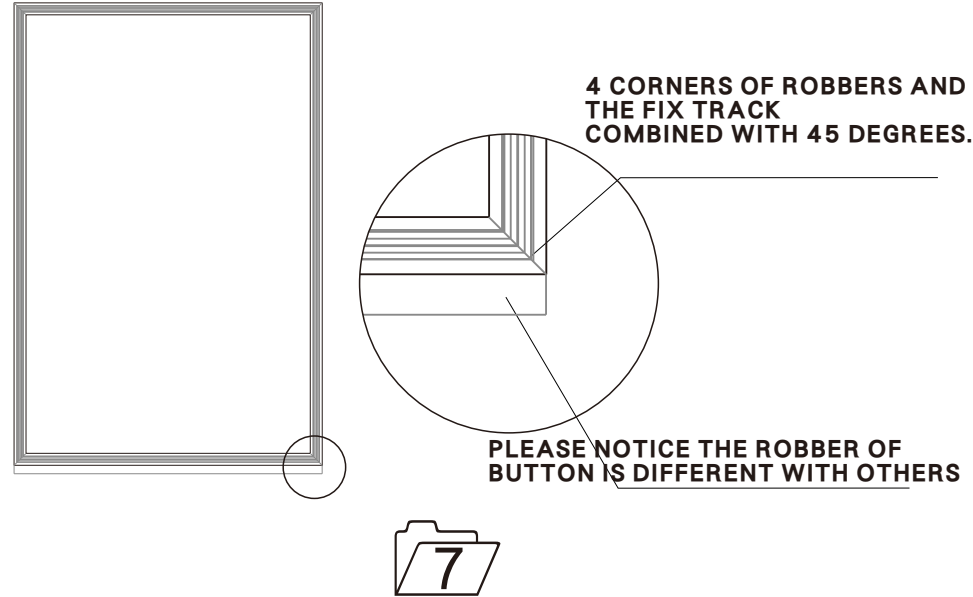


- (A) The FUNCTION of the ELECTRIC LOCK will work when ⑪ and ⑫ are short circuit, then ⑬ and ⑭ will output DC13V for ELECTRIC LOCK after the door closes. ⑬ and ⑭ will not output DC13V if ⑪ and ⑫ are not short circuit.
- (B) The SIGNAL of the SAFETY BEAM is controlled by ⑨ and ⑩. When door is opening and running, ⑨ and ⑩ keep to accept the signal, then the SAFETY BEAM will be working. ⑨ and ⑩ will not work when the door is closed, then the SAFETY BEAM will lose efficacy when the door is closed.
- (C) The signal of Side Screen Safety Sensor is controlled by ⑮ and ⑯. Side Screen Safety Sensors are placed at the rear end of the door to prevent collisions during the opening movement of the moving leaves. When the signal activates, the moving leaves will become slowly, till the door opens fully, then close normally.

MICRO-CONTROLLER

Input connect

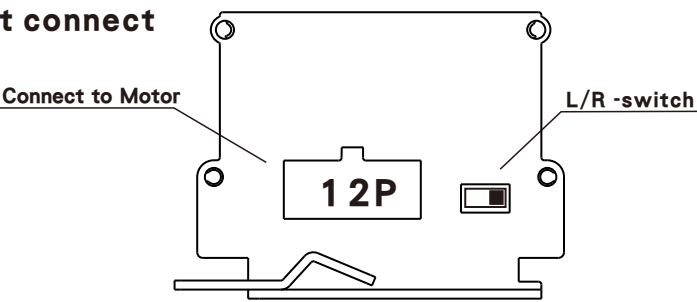

Output connect

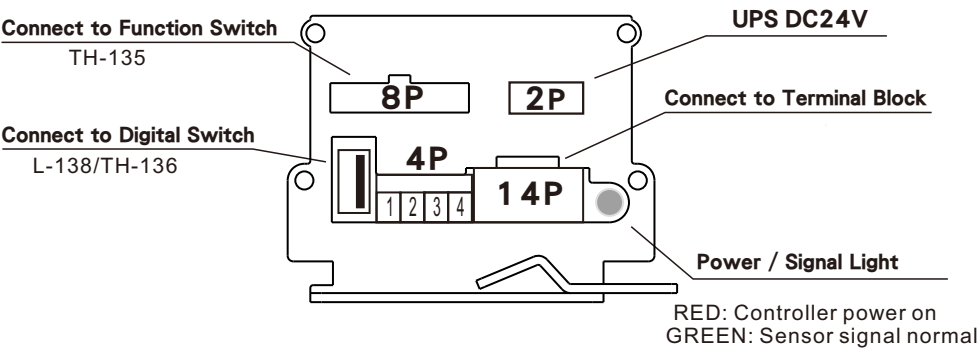

4P terminal

1	2	3	4
---	---	---	---

1.DC24V⊕


2.GND ⊖


3.

4.


Power of SENSOR

The signal of SENSOR

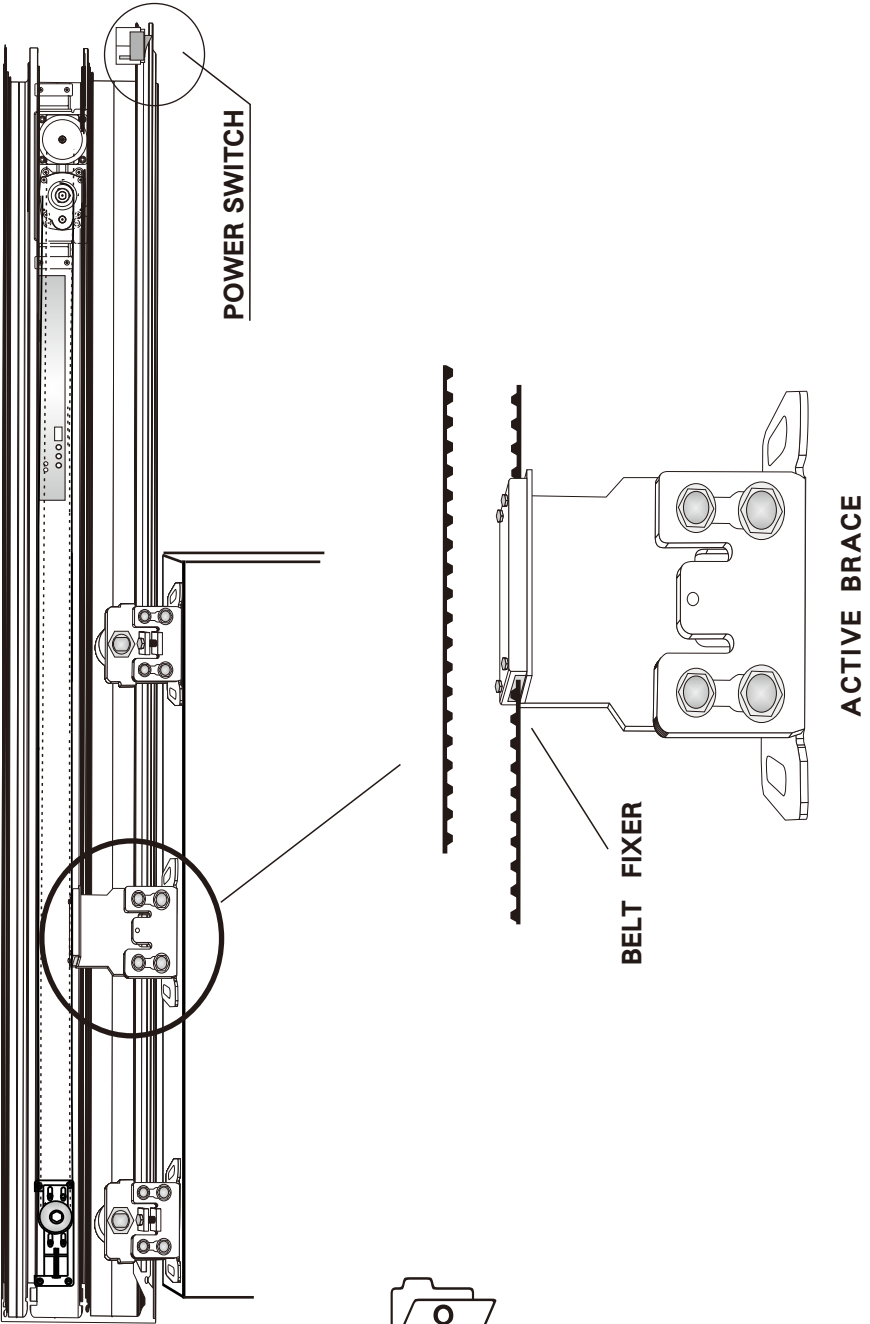

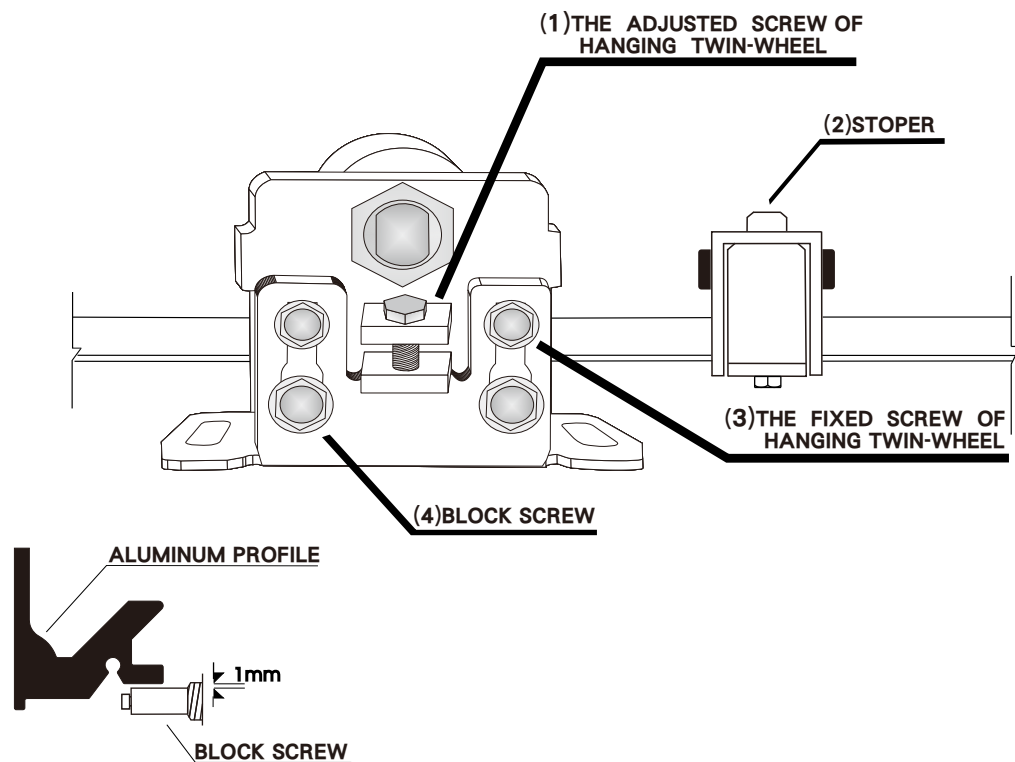


- A** When Door-Leaf height and interval need to adjust, loose (3) at first, then adjust (1).
- B** Need to fasten (3) after adjust **A** .
- C** Install above-mentioned (2) after make sure the DOOR OPEN POSITION.

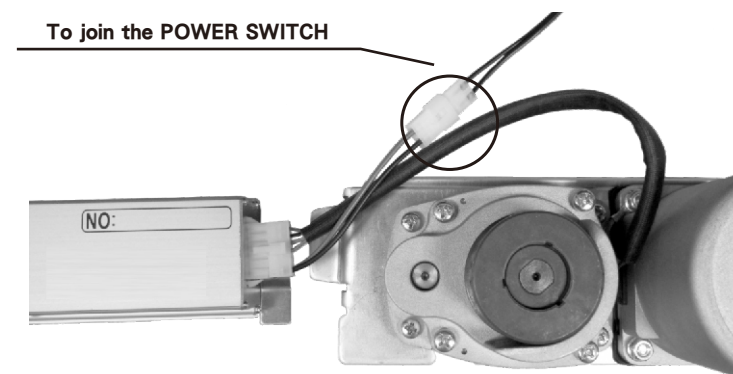

The ILLUSTRATED of CONTROLLER and MOTOR.

Power supply (input)
Either AC100V~240V

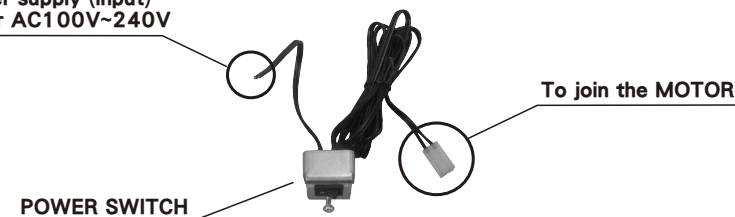

Warning

Please confirm WHETHER the SENSOR VOLTAGE is the same as the power supply. If different between them, need to add the TRANSFORMER, otherwise the SENSOR would be burned.