



KTH FAIL-SECURE LOCK

KTH FLOOR GUIDE

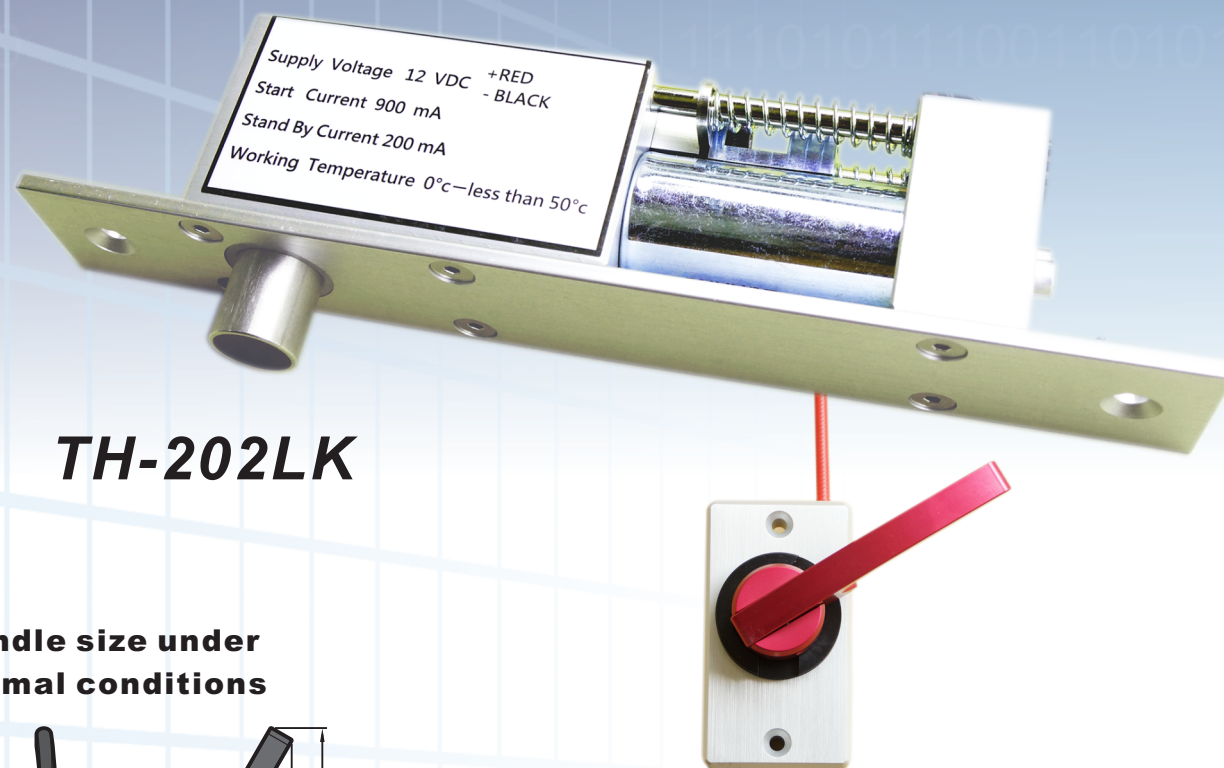


TH-202LK

Handle size under normal conditions

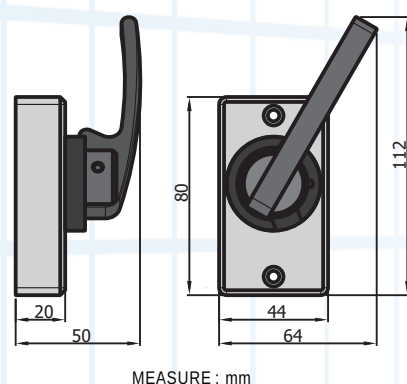


Handle size under unlocked conditions

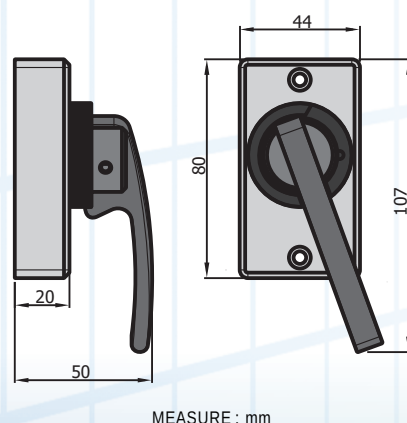

TECHNICAL SPECIFICATION

- Voltage: DC12V.
- Start Current: 900mA.
- Standby Current: 200mA.
- Surface size: L205mm X W32mm X H44mm.


WIRING DIAGRAM

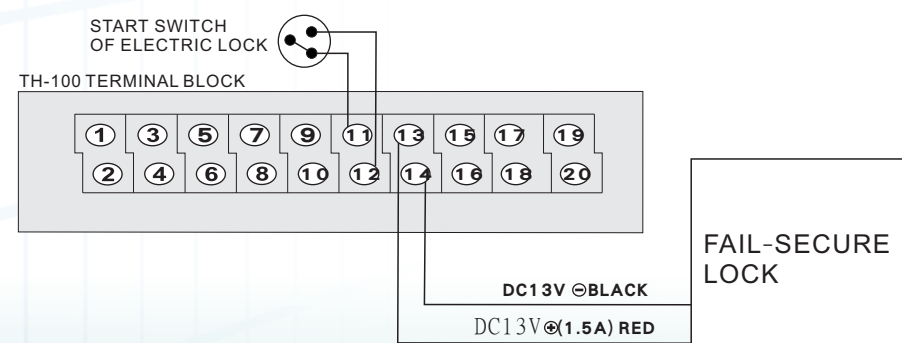


GW-30(M)

GW-50(L)

Dimantion (Long)

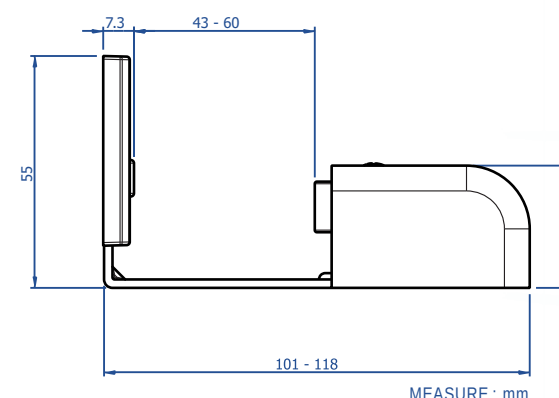

Dimantion (Short)

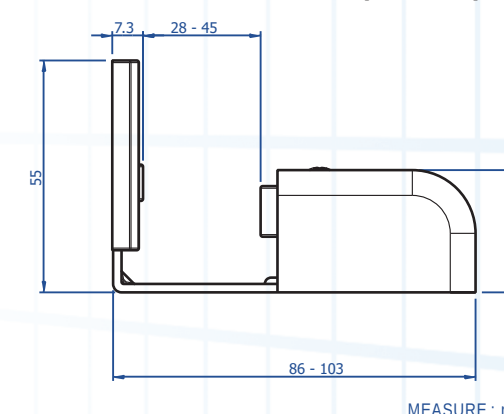

DETAILED DESCRIPTION

- Application: Glass sliding door floor guide.
- Durable, 304 Stainless Steel, resists corrosion and wear.
- Adjustable and alternative M and L types for different door width:
M type: range 26-43mm.
L type: range 40-57mm.